

REFRIGERATION SOLUTIONS TO HELP YOUR BUSINESS DO BETTER.





Reach-in Chillers/ Freezers and Combo

Easy storage meets accurate temperature control.

Blue Star's range of indigenised Reach-in Chillers, Freezers and Combo is designed for commercial kitchen needs with upright cabinets that ensure convenient storage and retrieval and provides the most reliable way of preserving food. These Chillers, Freezers and Combo have a robust design that helps in keeping food fresh for a longer period. Just what you'd expect from the Experts in cooling.



Technical Specifications - Reach-in						
	Chi	llers	Free	zers	Combo	
Description	RCH2D0500S	RCH4D1100S	RFR2D0500S	RFR4D1100S	RCF4D1100S	
Internal Capacity (Ltrs)	472	1075	472	1045	504+504	
Temperature Range (°C)	-5° ~ +7°C	-5° ~ +7°C	-5° ~ -24°C	-5° ~ -24°C	-5° ~ +7°C/-5° ~ -24°C	
No. of Doors (Nos.)	2	4	2	4	4	
Cabinet and Doors (Int/Ext)	SS430	SS430	SS430	SS430	SS430	
Shelves Qty (Nos.)	3	6	3	6	6	
Light	LED Light	LED Light	LED Light	LED Light	LED Light	
Refrigerant Gas (Type/Charge in grams)	R290/57g	R290/62g	R290/62g	R290/62g	R290/57+62g	
Voltage Supply & Frequency (V - Hz)	230V-50Hz	230V-50Hz	230V-50Hz	230V-50Hz	230V-50Hz	
Power (Watts)	160 W	220 W	230 W	420 W	380 W	
Current (Amps)	1.1	1.1	1.1	2.4	2.4	
Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	
Temperature Display Led	Digital	Digital	Digital	Digital	Digital	
External Dimension (WxDxH) mm	640x835x1910	1260x835x1910	640x835x1910	1260x835x1910	1260x835x1910	
Net Weight (Kg)	80.5	120	81	136	142	
Gross Weight (Kg)	96	146	96	164	169	



BUILT ON TRUST

For more information, please contact **BLUE STAR LIMITED · AHMEDABAD**: Tel:(079) 40224000 • **BENGALURU** : Tel: (080) 41854000 • **BHUBANESWAR**: Tel: (0674) 2572403/2573670 • **CHANDIGARH**: Tel: (0172) 4155100 • **CHENNAI**: Tel: (044) 42444000 • **GHAZIABAD**: Tel: (0120) 2821400 • **GOA**: Tel: (0832) 2438171 / 2437287 • **GUWAHATI**: Tel: (0361) 2468496 • **GURUGRAM**: Tel: (0124) 4094000 • **INDORE**: Tel: (0731) 4001211 / 4001311 • **JAIPUR**: Tel: (0141) 3313000 • **KOCHI**: Tel: (0484) 4499000 • **KOLKATA**: Tel: (033) 40815400 • **LUDHIANA**: Tel: (0161) 5001404 • **LUCKNOW**: Tel: (0522) 4034000 • **MUMBAI**: Tel: (022) 66684000 • **NAGPUR**: Tel: (0712) 6624000 • **PUNE**: Tel: (020) 41044000/26167230 • **RAIPUR**: Tel: (0771) 4280900 • **SECUNDERABAD**: Tel: (040) 44004100 • **THIRUVANANTHAPURAM**: Tel: (0471) 2435025 • **VADODARA**: Tel: (0265) 6614000/2652332021/22 • **VIJAYAWADA**: Tel: (0866) 2484004 • **VISAKHAPATNAM**: Tel: (0891) 6686705 • email: coolingsolutions@bluestarindia.com • visit us at: www.bluestarindia.com



BLUE STAR

High performance comes with heavy duty build.

Blue Star's range of Undercounter Chillers and Freezers provide precise temperatures and are built aesthetically for heavy-duty use. Their rugged doors, hinges and handles deliver sustained and superior performance thus making them ideal for busy hotel and restaurants.

These Undercounter Chillers and Freezers is ideal for storing premixes and preparation materials. This range comes with an auto door close mechanism and uses food grade stainless steel to keep food fresh.



Technical Specifications - Undercounter Chillers and Freezers							
Model Name	UCH2D0300S	UFR2D0300S	UCH2D0400S	UFR2D0400S	UCH3D0500S	UFR3D0500S	
Capacity In Ltrs	307	307	400	400	492	492	
Temperature Range °C	0°C~7°C	-3°C~-24°C	0°C~7°C	-3°C~-24°C	0°C~7°C	-3°C~-24°C	
No. of Doors	2 Nos.	2 Nos.	2 Nos.	2 Nos.	3 Nos.	3 Nos.	
Cabinet and Doors (Int/Ext)	SS430	SS430	SS430	SS430	SS430	SS430	
Shelves Qty	2 Nos.	2 Nos.	2 Nos.	2 Nos.	3 Nos.	3 Nos.	
Refrigerant	R290	R290	R290	R290	R290	R290	
Voltage Supply & Frequency (V-Hz)	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	
Power (Watts)	150W	230W	165W	240W	180W	250W	
Current (Amps)	0.8A	1.3A	0.8A	1.3A	1.3A	1.4A	
Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	
External Dimension(WxDxH) mm	1200x700x850	1200x700x850	1500x700x850	1500x700x850	1800x700x850	1800x700x850	
Net Weight (Kg)	65	68	79	82	89	92	
Gross Weight (Kg)	70	73	85	88	96	99	

Note: Technical specifications are subject to change due to continuous product improvements.



For more information, please contact **BLUE STAR LIMITED · Ahmedabad:** Tel: (079) 40224000 • **Bengaluru:** Tel: (080) 41854000 **Bhubaneshwar:** Tel: (0674) 2572403/2573670 **Chandigarh:** Tel: (0172) 5024000 • **Chennai:** Tel: (044) 42444000 • **Coimbatore:** Tel: (0422) 4244400 • **Ghaziabad:** Tel: (0120) 2821400 • **Goa:** Tel: (0832) 2438171/2437287 • **Gurugram:** Tel: (0124) 4094000 • **Guwahati:** Tel: (0361) 2468496 • **Indore:** Tel: (0731) 4001211/4001311 • **Jaipur:** Tel: (0141) 3313000 • **Jamshedpur:** Tel: (0657) 2221530 • **Kochi:** Tel: (0484) 4499000 **Kolkata:** Tel: (033) 40815400 • **Lucknow:** Tel: (0522) 4034000 • **Ludhiana:** Tel: (0161) 5064000 • **Mumbai:** Tel: (022) 66684000 • **Nagpur:** Tel: (0712) 6624000 • **New Delhi:** Tel: (011) 41494000 • **Pune:** Tel: (020) 41044000 • **Secunderabad:** Tel: (040) 44004000 • **Raipur:** Tel: (0771) 4280900 • **Thiruvananthapuram:** Tel: (0471) 2435025 • **Vadodara:** Tel: (0265) 6614000 • **Vijayawada:** Tel: (0866) 2484004 • **Visakhapatnam:** Tel: (0891) 2748405 • email: **coolingsolutions@bluestarindia.com** Visit us at: **www.bluestarindia.com** SMS **'COOL'** to **57575**



KITCHEN REFRIGERATION



BLUE STAR SALADETTES AND SANDWICH STATIONS. **EXCEPTIONAL EFFICIENCY AND ROBUST CONSTRUCTION.**







Ь

igital	temperat	ure

Technical Specification

Description SC21006A SC31006A Capacity (Ltrs) 260 400 No. of Doors (Nos.) 2 3 Type of Doors (Int/Ext) SS-201/201 SS-201/201 Temperature Range OC 2° to +8°C 2° to +8°C Shelves Qty (Nos.) 72 3 3 Gn Pan GN2/1 GN2/1 GN2/1 Toppings Pan Slot YES YES YES Refrigerant Gas (Type/Charge) R290/55g R290/50Hz 220-240V/50Hz Voltage supply & Frequency (V-Hz) 2111A 15A 152W Current Amps 1.11A 1.5A 154 Defrost Automatic Automatic 10igital Kternal Dimension (W x D X H) mm 900 x 700 x 990 1365 x 700 x 990	Saladettes and Sandwich Stations					
No. of Doors (Nos.)23Type of Doors (Int/Ext)SS-201/201SS-201/201Temperature Range OC2º to +8ºC2º to +8ºCShelves Qty (Nos.)23Gn PanGN2/1GN2/1Toppings Pan SlotYESYESRefrigerant Gas (Type/Charge)R290/55gR290/60gVoltage supply & Frequency (V-Hz)220-240V/50Hz220-240V/50HzQuerrent Amps1.1A1.5ADefrostAutomaticAutomaticThermostatDigitalDigital	Description	SC2100GA	SC3100GA			
Type of Doors (Int/Ext) SS-201/201 Temperature Range OC 2° to +8°C Shelves Qty (Nos.) 2 Gn Pan GN2/1 Toppings Pan Slot YES Refrigerant Gas (Type/Charge) R290/55g Voltage supply & Frequency (V-Hz) 220-240V/50Hz Qurrent Amps 114 Defrost Automatic Thermostat Digital Digital 000 x 700 x 990	Capacity (Ltrs)	260	400			
Temperature Range OC 2º to +8ºC 2º to +8ºC Shelves Qty (Nos.) 2 3 Gn Pan GN2/1 GN2/1 Toppings Pan Slot YES YES Refrigerant Gas (Type/Charge) R290/55g R290/60g Voltage supply & Frequency (V-Hz) 220-240V/50Hz 220-240V/50Hz Max Input Power 143W 152W Current Amps Automatic Automatic Defrost Automatic Jigital Thermostat Digital Digital	No. of Doors (Nos.)	2	3			
Shelves Qty (Nos.) 2 3 Gn Pan GN2/1 GN2/1 Toppings Pan Slot YES YES Refrigerant Gas (Type/Charge) R290/55g R290/60g Voltage supply & Frequency (V-Hz) 220-240V/50Hz 220-240V/50Hz Max Input Power 143W 152W Current Amps 1.1A 1.5A Defrost Automatic Automatic Thermostat Digital Digital	Type of Doors (Int/Ext)	SS-201/201	SS-201/201			
Gn PanGN2/1GN2/1Toppings Pan SlotYESYESRefrigerant Gas (Type/Charge)R290/55gR290/60gVoltage supply & Frequency (V-Hz)220-240V/50Hz220-240V/50HzMax Input Power143W152WCurrent Amps1.1A1.5ADefrostAutomaticAutomaticThermostatDigitalDigitalExternal Dimension (W x D X H) mm900 x 700 x 9901365 x 700 x 990	Temperature Range OC	2º to +8ºC	2º to +8ºC			
Toppings Pan SlotYESToppings Pan SlotYESRefrigerant Gas (Type/Charge)R290/55gVoltage supply & Frequency (V-Hz)220-240V/50HzMax Input Power143WCurrent Amps1.1ADefrostAutomaticThermostatDigitalDigital Dimension (W x D X H) mm900 x 700 x 990	Shelves Qty (Nos.)	2	3			
Refrigerant Gas (Type/Charge)R290/55gR290/60gVoltage supply & Frequency (V-Hz)220-240V/50Hz220-240V/50HzMax Input Power143W152WCurrent Amps1.1A1.5ADefrostAutomaticAutomaticThermostatDigitalDigitalExternal Dimension (W x D X H) mm900 x 700 x 9901365 x 700 x 990	Gn Pan	GN2/1	GN2/1			
Voltage supply & Frequency (V-Hz)220-240V/50Hz220-240V/50HzMax Input Power143W152WCurrent Amps1.1A1.5ADefrostAutomaticAutomaticThermostatDigitalDigitalExternal Dimension (W x D X H) mm900 x 700 x 9901365 x 700 x 990	Toppings Pan Slot	YES	YES			
Max Input Power143W152WCurrent Amps1.1A1.5ADefrostAutomaticAutomaticThermostatDigitalDigitalExternal Dimension (W x D X H) mm900 x 700 x 9901365 x 700 x 990	Refrigerant Gas (Type/Charge)	R290/55g	R290/60g			
Current Amps 1.1A 1.5A Defrost Automatic Automatic Thermostat Digital Digital External Dimension (W x D X H) mm 900 x 700 x 990 1365 x 700 x 990	Voltage supply & Frequency (V–Hz)	220-240V/50Hz	220-240V/50Hz			
Defrost Automatic Thermostat Digital External Dimension (W x D X H) mm 900 x 700 x 990	Max Input Power	143W	152W			
Thermostat Digital External Dimension (W x D X H) mm 900 x 700 x 990	Current Amps	1.1A	1.5A			
External Dimension (W x D X H) mm 900 x 700 x 990 1365 x 700 x 990	Defrost	Automatic	Automatic			
	Thermostat	Digital	Digital			
Net Weight (kg) 72 110	External Dimension (W x D X H) mm	900 x 700 x 990	1365 x 700 x 990			
	Net Weight (kg)	72	110			
Gross Weight (kg) 83 130	Gross Weight (kg)	83	130			



BLUE STAR BLAST FREEZERS. **RAPID COOLING SOLUTIONS** FOR PRESERVING FOOD QUALITY.



Tropicalised for Indian conditions

Claternal /external construction

made of stainless steel AISI 304

Automatic defrosting system with pause

Technical Specification

L

Blast Chillers & Freezers						
Description	BF05G	BF10G	BF15G			
Cooling Type	Chiller & Freezer	Chiller & Freezer	Chiller & Freezer			
Chilling Volume (Kg)	18	34	50			
Freezing Volume (Kg)	11	22	38			
Phase	Single	Single	Three			
Chilling Temp C	+90ºC / +3ºC	+90ºC / +3ºC	+90ºC / +3ºC			
Freezing Temp °C	+90°C / -33°C	+90ºC / –33ºC	+90°C / –33°C			
Ргор	1 Nos.	1 Nos.	1 Nos.			
Defrost	Automatic	Automatic	Automatic			
Temperature Display	Digital	Digital	Digital			
Door	Solid Door	Solid Door	Solid Door			
Voltage Supply & Frequency (V – Hz)	230V/50Hz	230V/50Hz	400V/50Hz			
Max Input Power	1185W	2010W	3820W			
Refrigerant Gas (Type/Charge)	R404a/850G	R404a/1600G	R404a/2400G			
Shelf	5 Gn1/1	10 Gn1/1	15 Gn1/1			
External Dimension (W x D x H) mm	800 x 700 x 900	800 x 780 x 1700	800 x 780 x 2000			
Net Weight (Kg)	92	145	175			
Gross Weight (Kg)	112	168	185			



Electronic temperature display



High performance




Time and probe based chiller and freezer temperature setting

е	Ζ	е	r	S	

BLUE STAR BACK BAR CHILLER. OUTSTANDING VISIBILITY WITH SPACE-SAVING DESIGN.

Blue Star offers Back Bar Chiller options that can be used at any bar, club and/or restaurant. With glass doors, they provide excellent visibility and are designed to save space. Storage in these chillers ensures great preservation and convenient, ready-to-serve drinks.

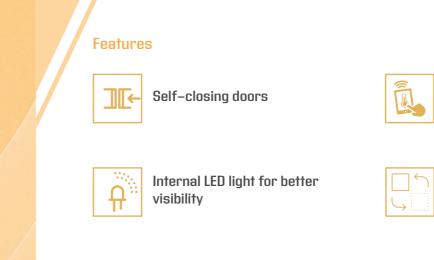



Lock fitted as standard

	_



Safety tempered glass and double glazed doors

Technical Specification

	Back Bar Chiller	
Description	BC250A	BC350A
Capacity (Ltrs)	190	320
Cooling Type	Ventilated	Ventilated
No. of Doors (Nos.)	2	3
Type of Doors	Glass Door	Glass Door
Temperature Range °C	1 to +10°C	1 to +10°C
Shelves Qty/Colour/Adjustable	4 / White	6 / White
Refrigerant Gas (Type/Charge)	R600a/70g	R600a/90g
Voltage Supply & Frequency (V – Hz)	220-240V/50Hz	220-240V/50Hz
Max Input Power	210W	345W
Defrost	Automatic	Automatic
External Dimension (W x D x H) mm	900 x 520 x 900	1350 x 520 x 900
Net Weight (Kg)	62	80
Gross Weight (Kg)	65	87.5



Digital temperature control

Replaceable gasket

Adjustable shelves and feet

BLUE STAR ICE MACHINES. **ICE OF ANY SHAPE.** FOR ANY OCCASION.



Features



Power saving design





Perfectly shaped ice



SS

Stainless steel body for

Water content control



Technical Specification

longer life

Ice Machines						
MODEL NAME	ICM-15	ICM-20	ICM-26	ICM-50	ICM-90	
Production in 24hrs	15kg	20kg	26kg	50kg	80kg	
Storage capacity	1.4kg	3.5kg	6kg	10kg	42kg	
Cooling System	Air Cooled					
Type of Ice	Bullet ice	Bullet ice	Bullet ice	Bullet ice	Gourmet	
Mass of Ice	10g	15g	15g	15g	25g	
Refrigerant	R600a	R600a	R600a	R290	R290	
Voltage / Frequency / Phase	220–240V–50Hz/1Ph	220-240V-50Hz/1Ph	220-240V-50H2/1Ph	220–240V–50Hz/1Ph	220-240V-50Hz/1Ph	
Rated Power	126W	178W	250W	295W	670W	
Product Dimension (WxDxH)	420x465x470 mm	440x530x647 mm	470x585x710 mm	570x665x896 mm	780x650x1045 mm	
Net weight	17kg	27kg	33kg	45.5kg	63.5kg	



Auto stop and start

Equipped with sprayers for easy cleaning

Compact design saves space

Designed for noiseless operation


BLUE STAR PASTRY SHOWCASE. **SO STYLISH IT MAKES** THE GOOD EVEN BETTER.



Tempered and low emissivity glass for unlimited visibility



glass shelves



Consumes less energy

	//
Ľ	

Technical Specification

Description	KORAL O9CSQP	KORAL 12CSQP	KORAL16CSQP	KORAL 18CSQP
Function	Chiller	Chiller	Chiller	Chiller
Structure	Square	Square	Square	Square
Size In Ft	3	4	5	6
Temp Range OC	2ºC to +8ºC	2ºC to +8ºC	2ºC to +8ºC	2ºC to +8ºC
Voltage/frequency	220V~240V~50Hz	220V~240V~50Hz	220V~240V~50Hz	220V~240V~50Hz
Refrigerant	R290	R290	R290	R290
Castor Wheels	Yes	Yes	Yes	Yes
Inner Material	SS201 – Food Safe			
Shelf Nos.	3	3	3	3
Side Panel	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass
Marble Base	Optional	Optional	Optional	Optional
Light	Yes	Yes	Yes	Yes
Dimension (WxDxH) In mm	900x750x1200	1200×750×1200	1500×750×1200	1800×750×1200
Weight In Kg	130	167	204	240



4 Castor wheels, 2 with brakes



Brilliant LED lighting



Available in different sizes (in feet): 3,4,5,6



Elegant finish